

## RED 直通变径接头 Straight reducer connector


- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
8	6	23.5	29	12	17	M14x1.5	M12x1.5	3.2	RED08/06L	BF1100608
10	6	25	31	14	19	M16x1.5	M12x1.5	4.0	RED10/06L	BF1100610
10	8	25	31	14	19	M16x1.5	M14x1.5	4.0	RED10/08L	BF1101008
	6	25	31				M12x1.5	6.0	RED12/06L	BF1100612
12	8	25	31	17	22	M18x1.5	M14x1.5	5.5	RED12/08L	BF1100812
	10	26	32				M16x1.5	5.5	RED12/10L	BF1101012
	6	28.8	34.5				M12x1.5	8.5	RED15/06L	BF1100615
15	8	28.5	34.5	22	27	M22x1.5	M14x1.5	9.5	RED15/08L	BF1100815
	10	29.5	35.5				M16x1.5	9.0	RED15/10L	BF1101015
	12	29.5	35.5				M18x1.5	9.0	RED15/12L	BF1101215
	6	28	33.5				M12x1.5	11.2	RED18/06L	BF1100618
	8	28	33.5				M14x1.5	11.5	RED18/08L	BF1100818
18	10	29	34.5	24	32	M26x1.5	M16x1.5	13.0	RED18/10L	BF1101018
	12	29	34.5				M18x1.5	15.5	RED18/12L	BF1101218
	15	30	35.5				M22x1.5	12.2	RED18/15L	BF1101518
	6	32	37.5				M12x1.5	16.0	RED22/06L	BF1100622
	8	32	37.5				M14x1.5	16.0	RED22/08L	BF1100822
22	10	33	38.5	27	36	M30x2	M16x1.5	16.0	RED22/10L	BF1101022
	12	33	38.5				M18x1.5	16.0	RED22/12L	BF1101222
	15	34	39.5				M22x1.5	18.5	RED22/15L	BF1101522
	18	33.5	39.5				M26x1.5	18.0	RED22/18L	BF1101822

## RED


### 直通变径接头

#### Straight reducer connector

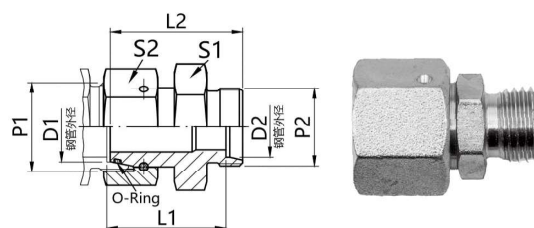

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
	6	34	48				M12x1.5	29.0	RED28/06L	BF1100628
	8	34	48.5				M14x1.5	29.0	RED28/08L	BF1100828
	10	35	49.5				M16x1.5	27.5	RED28/10L	BF1101028
28	12	35	49	36	46	M36x2	M18x1.5	28.0	RED28/12L	BF1101228
	15	36	51				M22x1.5	28.0	RED28/15L	BF1101528
	18	35.5	51.5				M26x1.5	28.5	RED28/18L	BF1101828
	22	37.5	53.5				M30x2	31.0	RED28/22L	BF1102228
	6	37	51				M12x1.5	35.0	RED35/06L	BF1100635
	8	37	51.5				M14x1.5	32.4	RED35/08L	BF1100835
	10	38	52.5				M16x1.5	36.0	RED35/10L	BF1101035
	12	38	52				M18x1.5	33.5	RED35/12L	BF1101235
35	15	39	54	46	50	M45x2	M22x1.5	34.0	RED35/15L	BF1101535
	18	38.5	54.5				M26x1.5	34.5	RED35/18L	BF1101835
	22	40.5	56.5				M30x2	35.0	RED35/22L	BF1102235
	28	40.5	56.5				M36x2	37.0	RED35/28L	BF1102835
	6	40.5	54.5				M12x1.5	49.5	RED42/06L	BF1100642
	8	40.5	55				M14x1.5	51.8	RED42/08L	BF1100842
	10	41.5	56				M16x1.5	50.0	RED42/10L	BF1101042
	12	41.5	55.5				M18x1.5	50.0	RED42/12L	BF1101242
42	15	42.5	57.5	50	60	M52x2	M22x1.5	46.0	RED42/15L	BF1101542
	18	42	58				M26x1.5	46.5	RED42/18L	BF1101842
	22	44	60				M30x2	48.5	RED42/22L	BF1102242
	28	44	60				M36x2	49.0	RED42/28L	BF1102842
	35	43	63.5				M45x2	55.0	RED42/35L	BF1103542

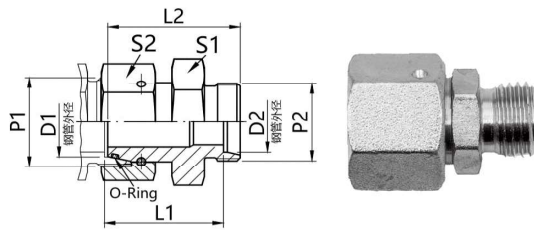

## RED 直通变径接头 Straight reducer connector

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈


- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
8	6	27	32.5	14	17	M16x1.5	M14x1.5	4.5	REDO8/06S	BF1600608
10	6	27.5	33	17	19	M18x1.5	M14x1.5	6.5	RED10/06S	BF1600610
10	8	27.5	33	17	19	M18x1.5	M16x1.5	6.5	RED10/08S	BF1600810
	6	30	35.5				M14x1.5	8.5	RED12/06S	BF1600612
12	8	30	35.5	19	22	M20x1.5	M16x1.5	8.5	RED12/08S	BF1600812
	10	29.5	35.5				M18x1.5	8.0	RED12/10S	BF1601012
	6	31.5	36.5				M14x1.5	11.1	RED14/06S	BF1600614
14	8	31.5	36.5	22	27	M22x1.5	M16x1.5	11.5	RED14/08S	BF1600814
	10	31	36.5				M18x1.5	10.2	RED14/10S	BF1601014
	12	31	36.5				M20x1.5	10.8	RED14/12S	BF1601214
	6	32	36.5				M14x1.5	11.5	RED16/06S	BF1600616
	8	32	36.5				M16x1.5	12.0	RED16/08S	BF1600816
16	10	31.5	36.5	22	30	M24x1.5	M18x1.5	13.0	RED16/10S	BF1601016
	12	31.5	36.5				M20x1.5	13.0	RED16/12S	BF1601216
	14	33	38.5	24	30		M22x1.5	13.0	RED16/14S	BF1601416
	6	36	40				M14x1.5	16.2	RED20/06S	BF1600620
	8	36	40				M16x1.5	18.5	RED20/08S	BF1600820
20	10	35.5	40	27	36	M30x2	M18x1.5	17.6	RED20/10S	BF1601020
	12	35.5	40				M20x1.5	19.0	RED20/12S	BF1601220
	14	37	42				M22x1.5	24.0	RED20/14S	BF1602420
	16	36.5	42				M24x1.5	19.2	RED20/16S	BF1601620

## RED

### 直通变径接头

#### Straight reducer connector

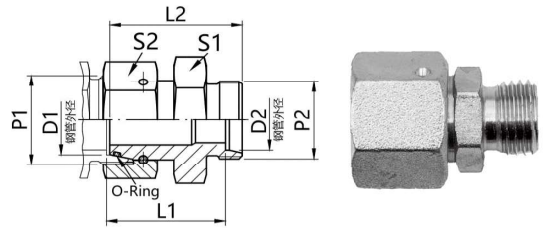

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
	6	38.5	41				M14x1.5	33.0	RED25/06S	BF1600625
	8	38.5	41				M16x1.5	33.0	RED25/08S	BF1600825
	10	38	41				M18x1.5	33.0	RED25/10S	BF1601025
25	12	38	41	36	46	M36x2	M20x1.5	33.5	RED25/12S	BF1601205
	14	39.5	43				M22x1.5	34.0	RED25/14S	BF1601425
	16	39	43				M24x1.5	34.0	RED25/16S	BF1601625
	20	39	45				M30x2	35.0	RED25/20S	BF1602025
	6	44	45				M14x1.5	40.5	RED30/06S	BF1600630
	8	44	45				M16x1.5	41.0	RED30/08S	BF1600830
	10	43.5	45				M18x1.5	41.5	RED30/10S	BF1601030
	12	43.5	45				M20x1.5	41.5	RED30/12S	BF1601230
30	14	45	47	41	50	M42x2	M22x1.5	47.0	RED30/14S	BF1601430
	16	44.5	47				M24x1.5	41.5	RED30/16S	BF1601630
	20	44.5	49				M30x2	43.0	RED30/20S	BF1602030
	25	45	51				M36x2	47.4	RED30/25S	BF1602530
	6	47.5	46				M14x1.5	57.0	RED38/06S	BF1600638
	8	47.5	46				M16x1.5	57.5	RED38/08S	BF1600838
	10	47	46				M18x1.5	58.0	RED38/10S	BF1601038
	12	47	46				M20x1.5	57.5	RED38/12S	BF1601238
38	14	48.5	48	50	60	M52x2	M22x1.5	67.2	RED38/14S	BF1601438
	16	48	48				M24x1.5	58.5	RED38/16S	BF1601638
	20	48	50				M30x2	59.0	RED38/20S	BF1602038
	25	48.5	52				M36x2	61.0	RED38/25S	BF1602538
	30	49	54				M42x2	67.5	RED38/30S	BF1603038