


EL

三通组合接头

Three-way combination connector

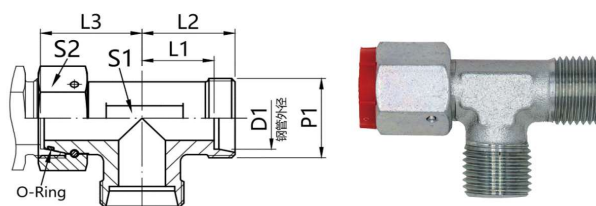

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹	重量	型号	产品编码
D1	L1	L2	L3	S1	S2	P1	kg/100	Type	Product Code
6	14	21	26	12	17	M12x1.5	4.4	EL06L	BF3120606
8	14	21	27.5	12	17	M14x1.5	5.3	EL08L	BF3120808
10	15	22	29	14	19	M16x1.5	6.8	EL10L	BF3121010
12	17	24	29.5	17	22	M18x1.5	9.5	EL12L	BF3121212
15	21	28	32.5	19	27	M22x1.5	15.1	EL15L	BF3121515
18	23.5	31	35.5	24	32	M26x1.5	23.3	EL18L	BF3121818
22	27.5	35	38.5	27	36	M30x2	30.9	EL22L	BF3122222
28	30.5	38	41.5	36	46	M36x2	43.6	EL28L	BF3122828
35	34.5	45	51	41	50	M45x2	66.6	EL35L	BF3123535
42	40	51	56	50	60	M52x2	116.3	EL42L	BF3124242
6	16	23	27	12	17	M14x1.5	6.5	EL06S	BF3620606
8	17	24	27.5	14	19	M16x1.5	8.4	EL08S	BF3620808
10	17.5	25	30	17	22	M18x1.5	11.8	EL10S	BF3621010
12	21.5	29	31	17	24	M20x1.5	13.6	EL12S	BF3621212
14	22	30	35	19	27	M22x1.5	17.3	EL14S	BF3621414
16	24.5	33	36.5	24	30	M24x1.5	26.0	EL16S	BF3621616
20	26.5	37	44.5	27	36	M30x2	37.5	EL20S	BF3622020
25	30	42	50	36	46	M36x2	65.5	EL25S	BF3622525
30	35.5	49	55	41	50	M42x2	90.6	EL30S	BF3623030
38	41	57	63	50	60	M52x2	147.2	EL38S	BF3623838