

20KA AW 气动快换-母头


Pneumatic quick change-female

- 口径 $2,7=6\text{mm}^2$
- 常用于小型气动、医疗、化学和制药行业
- 工作压力 $P_B=35\text{bar}$
- 适用温度：
 - 20°C~+100°C (NBR)
 - 40°C~+120°C (EPDM)
 - 15°C~+200°C (FKM)
- Orifice $2,7=6\text{mm}$
- Commonly used in small pneumatic, medical, chemical and pharmaceutical industries
- Working pressure $P_B=35\text{bar}$
- Applicable temperature:
 - 20°C~+100°C (NBR)
 - 40°C~+120°C (EPDM)
 - 15°C~+200°C (FKM)

尺寸		六角	螺纹	型号	产品编码
L1	L2	S1	P1	Type	Product Code
5	26	9	M5	20KAAW05 MPX	QC96000001
				20KAAW05 MPN	QC96000002
7	28	11	G1/8	20KAAW10 MPX	QC96000003
				20KAAW10 MPN	QC96000004

注: MPX为标准, MPN为镀镍

Note: MPX is standard, MPN is nickel plated

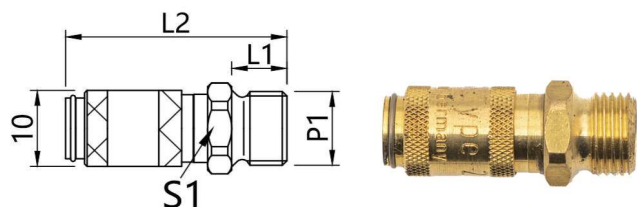

20KB AW 气动快换-母头

Pneumatic quick change-female

- 口径 $2,7=5\text{mm}^2$
- 常用于小型气动、医疗、化学和制药行业
- 工作压力 $P_B=35\text{bar}$
- 适用温度：
 - 20°C~+100°C (NBR)
 - 40°C~+120°C (EPDM)
 - 15°C~+200°C (FKM)
- Orifice $2,7=5\text{mm}$
- Commonly used in small pneumatic, medical, chemical and pharmaceutical industries
- Working pressure $P_B=35\text{bar}$
- Applicable temperature:
 - 20°C~+100°C (NBR)
 - 40°C~+120°C (EPDM)
 - 15°C~+200°C (FKM)

尺寸		六角	螺纹	型号	产品编码
L1	L2	S1	P1	Type	Product Code
5	26	9	M5	20KB AW05 MPX	QC96000005
				20KB AW05 MPN	QC96000006
7	28	11	G1/8	20KB AW10 MPX	QC96000007
				20KB AW10 MPN	QC96000008

注: MPX为标准, MPN为镀镍

Note: MPX is standard, MPN is nickel plated