


PLT1 快换接头

Quick-change connector

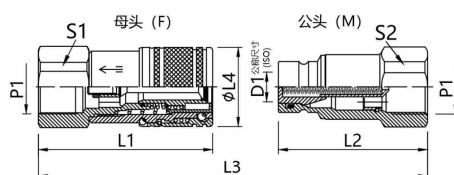

- 符合ISO16028
- 常规供货碳钢/表面镀锌, 不锈钢
- 工作温度: -25°C ~+125°C
- 标准密封: 丁腈橡胶
- Compliant with ISO16028
- Generally available in carbon steel/galvanized surface, stainless steel
- Working temperature: -25°C ~+125°C
- Standard seal: Nitrile rubber

公称尺寸 (ISO)		尺寸				六角		螺纹		型号 (母头F)	产品编码	型号 (公头M)	产品编码
D1	L1	L2	L3	L4	S1	S2	P1	Type	Product Code	Type	Product Code		
6.3	58.5	53.5	101.5	28	22	22	G1/4A	PLT1.0606.002	QC81150404	PLT1.0606.003	QC81100404		
							1/4NPT	PLT1.0606.012	QC81170404	PLT1.0606.013	QC81120404		
10	67.5	63.5	116	32	27	27	G3/8A	PLT1.1310.002	QC81250606	PLT1.1310.003	QC81200606		
							3/8NPT	PLT1.1310.012	QC81270606	PLT1.1310.013	QC81220606		
							G1/2	PLT1.1313.002	QC81250808	PLT1.1313.003	QC81200808		
							1/2NPT	PLT1.1313.012	QC81270808	PLT1.1313.013	QC81220808		
12.5	84	76	137	38	32	32	G1/2A	PLT1.2013.002	QC81350808	PLT1.2013.003	QC81300808		
							1/2NPT	PLT1.2013.012	QC81370808	PLT1.2013.013	QC81320808		
							G3/4A	PLT1.2019.002	QC81351212	PLT1.2019.003	QC81301212		
19	94	86	157.5	48	46	41	G3/4A	PLT1.2519.002	QC81451212	PLT1.2519.003	QC81401212		
							3/4NPT	PLT1.2519.012	QC81471212	PLT1.2519.013	QC81421212		
							G1A	PLT1.2525.002	QC81451616	PLT1.2525.003	QC81401616		
25	109.5	90	177	55	50	50	G1 1/4A	PLT1.3031.002	QC81552020	PLT1.3031.003	QC81502020		
							1 1/4NPT	PLT1.3031.012	QC81572020	PLT1.3031.013	QC81522020		
							G1 1/2A	PLT1.3939.002	QC81752424	PLT1.3939.003	QC81702424		
40	118.5	119.5	210	79	70	70	1 1/2NPT	PLT1.3939.012	QC81772424	PLT1.3939.013	QC81722424		
							G2A	PLT1.5051.112	QC81853232	PLK4.5051.113	QC81803232		
50	147.5		290	103	80	80	2NPT	PLT1.5051.012	QC81873232	PLK4.5051.013	QC81823232		

公称尺寸 ISO	公称通径 DN(mm)	最大工作压力 Mpa	爆破压力 Mpa	额定流量 L/m
6.3	6.1	31.5	180	12
10	8.7	25	164	23
12.5	11.2	25	156	45
19	15.5	25	140	100
25	18	25	130	189
40	30	25	129	379
50	40	25	100	757