


VBCD DE/FL

双向平衡阀

Two-way balance valve

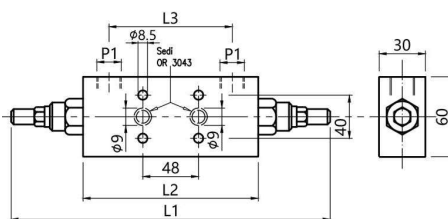

- 材料: 镀锌钢
- 内材料: 硬化钢
- 标准压力: 32Mpa


- Material: galvanized steel
- Inner material: hardened steel
- Standard pressure: 32Mpa

L1	尺寸		螺纹 P1	最大流量 L/min	最大压力 Mpa	重量 kg/100	型号 Type	产品编码 Product Code
	L2	L3						
248	150	110	G3/8	40	35	201.2	VBCD3/8 DE/FL	HV10201
248	150	110	G1/2	60	35	198.0	VBCD1/2 DE/FL	HV10202

4890

单向平衡阀

One-way balance valve



- 材料: 不锈钢
- 内有FKM密封件
- 适用于腐蚀性环境
- 开启压力: 0.36Mpa
- 压力范围: 0.7~58Mpa
- 温度范围: -20~+180°C

- Material: Stainless steel
- With FKM seal inside
- Suitable for corrosive environment
- Opening pressure: 0.36Mpa
- Pressure range: 0.7~58Mpa
- Temperature range: -20~+180°C

DN D1	尺寸		六角 S1	螺纹 P1	流量(9Mpa时) L/min	重量 kg/100	型号 Type	产品编码 Product Code
	L1	L2						
10	50	22	17	G1/8	2.6	8.4	4890 1010	HV10301
10	50	22	17	G1/4	2.7	7.4	4890 1313	HV10302
15	67	30	22	G3/8	4.9	18.2	4890 1717	HV10303
15	71	30	25	G1/2	5.0	19.6	4890 2121	HV10304
20	84	42	32	G3/4	9.0	28.8	4890 2727	HV10305
25	90	42	38	G1	12.7	41.6	4890 3434	HV10306