


WFS SAE 直角法兰接头 Right angle flange connector

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 3000 PSI 系列
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- 3000 PSI series

法兰尺寸 (P2) SAE (in)	ISO (DN)	钢管外径		尺寸				六角	螺纹	重量	适用螺栓	型号	产品编码
		D1	D2	L1	L2	L3	L4	S1	P1	kg/100	公制/Metric	Type	Product Code
1/2	13	15L	30.2	29	36	6.7	36	24	M22x1.5	40.0	M8x25	WFS32/15L	BF8131508
1/2	13	18L	30.2	42.5	50	6.7	44	22	M26x1.5	44.0	M8x25	WFS32/18L	BF8131808
1/2	13	12S	30.2	42.5	50	6.7	44	22	M20x1.5	38.0	M8x25	WFS32/12S	BF8161208
1/2	13	16S	30.2	29.5	38	6.7	36	24	M24x1.5	43.0	M8x25	WFS32/16S	BF8161608
3/4	19	18L	38.1	31.5	39	6.7	42	30	M26x1.5	66.0	M10x30	WFS33/18L	BF8131812
3/4	19	22L	38.1	33.5	41	6.7	42	30	M30x2	66.0	M10x30	WFS33/22L	BF8132212
3/4	19	16S	38.1	55.5	64	6.7	53	27	M24x1.5	60.0	M10x30	WFS33/16S	BF8161612
3/4	19	20S	38.1	32.5	43	6.7	42	30	M30x2	76.0	M10x30	WFS33/20S	BF8162012
3/4	19	25S	38.1	33	45	6.7	42	30	M36x2	89.0	M10x30	WFS33/25S	BF8162512
1	25	22L	44.5	57.5	65	8	60	34	M30x2	81.0	M10x30	WFS33/22L	BF8132216
1	25	28L	44.5	36.5	44	8	45	36	M36x2	85.0	M10x30	WFS33/28L	BF8132816
1	25	20S	44.5	54.5	65	8	60	34	M30x2	78.0	M10x30	WFS34/20S	BF8162016
1	25	25S	44.5	36.5	48	8	45	36	M36x2	95.0	M10x30	WFS34/25S	BF8162516
1	25	30S	44.5	36.5	50	8	45	36	M42x2	106.0	M10x30	WFS34/30S	BF8163016
1 1/4	32	35L	50.8	46.5	57	8	50	41	M45x2	115.0	M12x40	WFS35/35L	BF8133520
1 1/4	32	25S	50.8	43	55	8	50	41	M36x2	135.0	M12x40	WFS35/25S	BF8162520
1 1/4	32	30S	50.8	43.5	57	8	50	41	M42x2	140.0	M12x40	WFS35/30S	BF8163020
1 1/4	32	38S	50.8	43	59	8	50	41	M52x2	153.0	M12x40	WFS35/38S	BF8163820
1 1/2	38	35L	60.3	67.5	78	8	66	50	M45x2	155.0	M12x35	WFS36/35L	BF8133524
1 1/2	38	42L	60.3	47	58	8	55	50	M52x2	160.0	M12x35	WFS36/42L	BF8134224
1 1/2	38	38S	60.3	48	64	8	55	50	M52x2	195.0	M12x35	WFS36/38S	BF8163824

WFS SAE
直角法兰接头
 Right angle flange connector

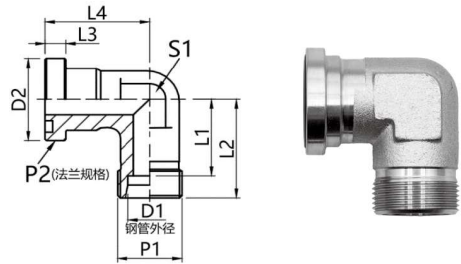

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 6000 PSI 系列
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- 6000 PSI series

法兰尺寸 (P2)		钢管外径		尺寸				六角	螺纹	重量	适用螺栓	型号	产品编码
SAE (in)	ISO (DN)	D1	D2	L1	L2	L3	L4	S1	P1	kg/100	公制/Metric	Type	Product Code
1/2	13	12S	31.8	42.5	50	7.7	44	22	M20x1.5	37.0	M8x30	WFS62/12S	BF8261208
1/2	13	14S	31.8	42	50	7.7	44	22	M22x1.5	39.0	M8x30	WFS62/14S	BF8261408
1/2	13	16S	31.8	29.5	37	7.7	39	24	M24x1.5	49.0	M8x30	WFS62/16S	BF8261608
3/4	19	16S	41.3	36.5	45	8.7	48	32	M24x1.5	92.0	M10x35	WFS63/16S	BF8261612
3/4	19	20S	41.3	35.5	46	8.7	48	32	M30x2	97.0	M10x35	WFS63/20L	BF8262012
3/4	19	25S	41.3	36	48	8.7	48	32	M36x2	119.0	M10x35	WFS63/25L	BF8262512
1	25	20S	47.6	54.5	65	9.5	62	34	M30x2	169.0	M12x45	WFS64/20S	BF8262016
1	25	25S	47.6	44	53	9.5	60	41	M36x2	167.0	M12x45	WFS64/25S	BF8262516
1	25	30S	47.6	41.5	55	9.5	60	41	M42x2	163.0	M12x45	WFS64/30S	BF8263016
1 1/4	32	25S	54	52	64	10.2	55	42	M36x2	223.0	M14x50	WFS65/25L	BF8262520
1 1/4	32	30S	54	44.5	58	10.2	68	46	M42x2	220.0	M14x50	WFS65/30L	BF8263020
1 1/4	32	38S	54	45	61	10.2	68	46	M52x2	239.0	M14x50	WFS65/38S	BF8263820
1 1/2	38	30S	63.5	63.5	76	12.5	77	50	M42x2	238.0	M16x55	WFS66/30S	BF8263024
1 1/2	38	38S	63.5	56	72	12.5	76	50	M52x2	258.0	M16x55	WFS66/38S	BF8263824