


W
等径弯接头
Equal diameter elbow connector

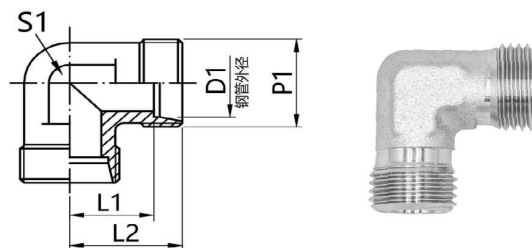

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- Comply with ISO8434-1, 24° ferrule connection
- Generally supplied carbon steel/galvanized surface, stainless steel

钢管外径	尺寸		六角	螺纹	重量	型号	产品编码
D1	L1	L2	S1	P1	kg/100	Type	Product Code
6	12	19	12	M12x1.5	2.9	W06L	BF2000606
8	14	21	12	M14x1.5	4.3	W08L	BF2000808
10	15	22	14	M16x1.5	5.4	W10L	BF2001010
12	17	24	17	M18x1.5	8.0	W12L	BF2001212
15	21	28	19	M22x1.5	8.1	W15L	BF2001515
18	23.5	31	24	M26x1.5	14.0	W18L	BF2001818
22	27.5	35	27	M30x2	17.8	W22L	BF2002222
28	30.5	38	36	M36x2	34.0	W28L	BF2002828
35	34.5	45	41	M45x2	45.8	W35L	BF2003535
42	40	51	50	M52x2	77.6	W42L	BF2004242
6	16	23	12	M14x1.5	5.2	W06S	BF2500606
8	17	24	14	M16x1.5	7.4	W08S	BF2500808
10	17.5	25	17	M18x1.5	9.7	W10S	BF2501010
12	21.5	29	17	M20x1.5	13.7	W12S	BF2501212
14	22	30	19	M22x1.5	14.5	W14S	BF2501414
16	24.5	33	24	M24x1.5	16.2	W16S	BF2501616
20	26.5	37	27	M30x2	22.1	W20S	BF2502020
25	30	42	36	M36x2	42.4	W25S	BF2502525
30	35.5	49	41	M42x2	60.3	W30S	BF2503030
38	41	57	50	M52x2	101.0	W38S	BF2503838