


GFS SAE 直法兰接头 straight flange connector

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 3000 PSI 系列

- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- 3000 PSI series

法兰尺寸 (P2)		钢管外径		尺寸			六角	螺纹	重量	适用螺栓	型号	产品编码
SAE (in)	ISO (DN)	D1	D2	L1	L2	L3	S1	P1	kg/100	公制/Metric	Type	Product Code
1/2	13	15L	30.2	41	48	6.7	24	M22x1.5	36.0	M8x25	GFS32/15L	BF8111508
1/2	13	18L	30.2	42.5	50	6.7	19	M26x1.5	42.0	M8x25	GFS32/18L	BF8111808
1/2	13	16S	30.2	41.5	50	6.7	24	M24x1.5	40.0	M8x25	GFS32/16S	BF8111608
3/4	19	18L	38.1	45.5	53	6.7	30	M26x1.5	59.0	M10x30	GFS33/18L	BF8111812
3/4	19	22L	38.1	45.5	53	6.7	30	M30x2	59.0	M10x30	GFS33/22L	BF8112212
3/4	19	28L	38.1	41	55	6.7	32	M36x2	60.0	M10x30	GFS33/28L	BF8112812
3/4	19	16S	38.1	46.5	55	6.7	27	M24x1.5	52.0	M10x30	GFS33/16S	BF8141612
3/4	19	20S	38.1	46.5	57	6.7	30	M30x2	65.0	M10x30	GFS33/20S	BF8142012
3/4	19	25S	38.1	45	57	6.7	30	M36x2	78.0	M10x30	GFS33/25S	BF8142512
1	25	28L	44.5	46.5	54	8	36	M36x2	73.0	M10x30	GFS34/28L	BF8112816
1	25	42L	44.5	65	76	8	41	M52x2	95.0	M10x30	GFS34/42L	BF8114216
1	25	20S	44.5	48.5	60	8	32	M30x2	70.0	M10x30	GFS34/20S	BF8142016
1	25	25S	44.5	46.5	58	8	36	M36x2	84.0	M10x30	GFS34/25S	BF8142516
1	25	30S	44.5	49.5	63	8	36	M45x2	94.0	M10x30	GFS34/30S	BF8143016
1 1/4	32	28L	50.8	52.5	60	8	36	M36x2	112.0	M12x40	GFS35/28L	BF8112820
1 1/4	32	35L	50.8	47.5	58	8	41	M45x2	102.0	M12x40	GFS35/35L	BF8113520
1 1/4	32	25S	50.8	48	60	8	41	M36x2	117.0	M12x40	GFS35/25S	BF8142520
1 1/4	32	30S	50.8	48.5	62	8	41	M42x2	120.0	M12x40	GFS35/30S	BF8143020
1 1/4	32	38S	50.8	50	66	8	46	M52x2	141.0	M12x40	GFS35/38S	BF8143820
1 1/2	38	35L	60.3	54.5	65	8	46	M45x2	120.0	M12x35	GFS36/35L	BF8113524
1 1/2	38	42L	60.3	53	64	8	46	M52x2	136.0	M12x35	GFS36/42L	BF8114224
1 1/2	38	38S	60.3	54	70	8	46	M52x2	163.0	M12x35	GFS36/38S	BF8143824

GFS SAE
直法兰接头
straight flange connector

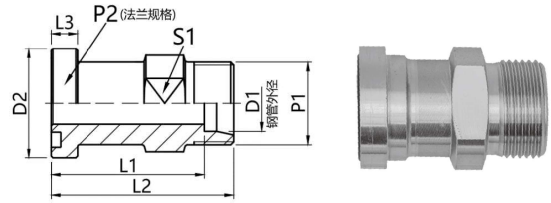

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 6000 PSI 系列

- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- 6000 PSI series

法兰尺寸 (P2)		钢管外径		尺寸			六角	螺纹	重量	适用螺栓	型号	产品编码
SAE (in)	ISO (DN)	D1	D2	L1	L2	L3	S1	P1	kg/100	公制/Metric	Type	Product Code
1/2	13	12S	31.8	42.5	50	7.7	19	M20x1.5	35.0	M8x30	GFS62/12S	BF8241208
1/2	13	14S	31.8	42	50	7.7	19	M22x1.5	39.0	M8x30	GFS62/14S	BF8241408
1/2	13	16S	31.8	44.5	53	7.7	24	M24x1.5	47.0	M8x30	GFS62/16S	BF8241608
3/4	19	16S	41.3	50.5	59	8.7	30	M24x1.5	79.0	M10x35	GFS63/16S	BF8241612
3/4	19	20S	41.3	50.5	61	8.7	30	M30x2	86.0	M10x35	GFS63/20S	BF8242012
3/4	19	25S	41.3	51	63	8.7	30	M36x2	97.0	M10x35	GFS63/25S	BF8242512
3/4	19	30S	41.3	62	76	8.7	30	M45x2	115.0	M10x35	GFS63/30S	BF8243012
3/4	19	38S	41.3	69	85	8.7	41	M52x2	115.0	M10x35	GFS63/38S	BF8243812
1	25	20S	47.6	64.5	75	9.5	36	M30x2	97.0	M12x45	GFS64/20S	BF8242016
1	25	25S	47.6	60	72	9.5	36	M36x2	142.0	M12x45	GFS64/25S	BF8242516
1	25	30S	47.6	62	74	9.5	36	M42x2	140.0	M12x45	GFS64/30S	BF8243016
1	25	38S	47.6	68	84.5	9.5	46	M52x2	140.0	M12x45	GFS64/38S	BF8243816
1 1/4	32	25S	54	68	80	10.2	41	M36x2	185.0	M14x50	GFS65/25S	BF8242520
1 1/4	32	30S	54	65.5	79	10.2	41	M42x2	190.0	M14x50	GFS65/30S	BF8243020
1 1/4	32	38S	54	67	83	10.2	46	M52x2	210.0	M14x50	GFS65/38S	BF8243820
1 1/2	38	30S	63.5	74	90	12.5	46	M42x2	210.0	M16x55	GFS66/30S	BF8243024
1 1/2	38	38S	63.5	73	89	12.5	46	M52x2	306.0	M16x55	GFS66/38S	BF8243824