


AS
焊接式接头
Welded connector

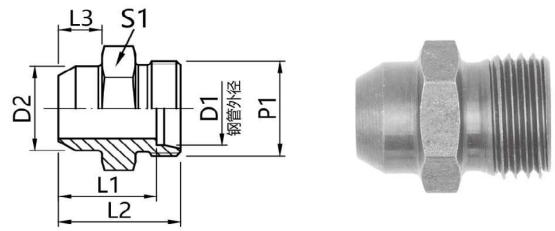

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- Comply with ISO8434-1, 24° ferrule connection
- Generally supplied carbon steel/galvanized surface, stainless steel

钢管外径		尺寸			六角	螺纹	重量	型号	产品编码
D1	D2	L1	L2	L3	S1	P1	kg/100	Type	Product Code
6	10	14	21	7	12	M12x1.5	1.1	AS06L	BF9110606
8	12	16	23	8	14	M14x1.5	1.5	AS08L	BF9110808
10	14	18	25	8	17	M16x1.5	2.2	AS10L	BF9111010
12	16	18	25	8	19	M18x1.5	2.5	AS12L	BF9111212
15	19	22	29	10	22	M22x1.5	4.3	AS15L	BF9111515
18	22	23.5	31	10	27	M26x1.5	6.6	AS18L	BF9111818
22	27	28.5	36	12	32	M30x2	9.8	AS22L	BF9112222
28	32	30.5	38	12	41	M36x2	15.9	AS28L	BF9112828
35	40	32.5	43	14	46	M45x2	23.0	AS35L	BF9113535
42	46	35	46	16	55	M52x	32.7	AS42L	BF9114242
6	11	19	26	7	14	M14x1.5	2.1	AS06S	BF9210606
8	13	21	28	8	17	M16x1.5	3.1	AS08S	BF9210808
10	15	22.5	30	8	19	M18x1.5	4.1	AS10S	BF9211010
12	17	24.5	32	10	22	M20x1.5	5.6	AS12S	BF9211212
14	19	27	35	10	24	M22x1.5	7.0	AS14S	BF9211414
16	21	26.5	35	10	27	M24x1.5	8.3	AS16S	BF9211616
20	26	29.5	40	12	32	M30x2	12.9	AS20S	BF9212020
25	31	32	44	12	41	M36x2	21.9	AS25S	BF9212525
30	36	35.5	49	14	46	M42x2	29.5	AS30S	BF9213030
38	44	38	54	16	55	M52x2	44.7	AS38S	BF9213838