


GZR


组合变径接头

Combined reducing connector

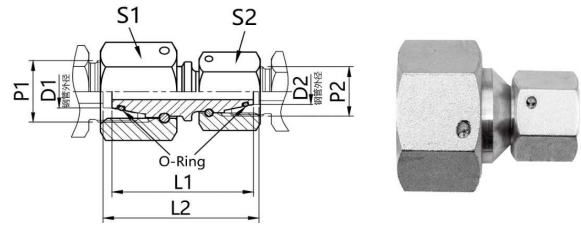

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
8	6	34	36	17	17	M14x1.5	M12x1.5		GZR08/06L	BF1200806
10	6	35	36.5	19	17	M16x1.5	M12x1.5		GZR10/06L	BF1201006
10	8	35	36.5	19	17	M16x1.5	M14x1.5		GZR10/08L	BF1201008
12	6	35	36.5	22	17	M18x1.5	M12x1.5		GZR12/06L	BF1201206
12	8	36	37.5	22	17	M18x1.5	M14x1.5		GZR12/08L	BF1201208
12	10	36.5	37.5	22	19	M18x1.5	M16x1.5		GZR12/10L	BF1201210
15	8	36.5	38	27	17	M22x1.5	M14x1.5		GZR15/08L	BF1201508
15	10	37.5	38.5	27	19	M22x1.5	M16x1.5		GZR15/10L	BF1201510
15	12	44	45	27	22	M22x1.5	M18x1.5		GZR15/12L	BF1201512
18	10	38	39.5	32	19	M26x1.5	M16x1.5		GZR18/10L	BF1201810
18	12	38	39.5	32	22	M26x1.5	M18x1.5		GZR18/12L	BF1201812
18	15	45	46.5	32	27	M26x1.5	M22x1.5		GZR18/15L	BF1201815
22	12	40.5	42	36	22	M30x2	M18x1.5		GZR22/12L	BF1202212
22	15	42	43.5	36	27	M30x2	M22x1.5		GZR22/15L	BF1202215
22	18	45	47	36	32	M30x2	M26x1.5		GZR22/18L	BF1202218
28	15	43	44.5	41	27	M36x2	M22x1.5		GZR28/15L	BF1202815
28	18	44	46	41	32	M36x2	M26x1.5		GZR28/18L	BF1202818
28	22	46	48	41	36	M36x2	M30x2		GZR28/22L	BF1202822
35	18	48	51.5	50	32	M45x2	M26x1.5		GZR35/18L	BF1203518
35	22	49.5	53	50	36	M45x2	M30x2		GZR35/22L	BF1203522
35	28	50	53.5	50	46	M45x2	M36x2		GZR35/28L	BF1203528
42	22	49.5	53.5	60	36	M52x2	M30x2		GZR42/22L	BF1204222
42	28	50	54	60	46	M52x2	M36x2		GZR42/28L	BF1204228
42	35	53	58.5	60	50	M52x2	M45x2		GZR42/35L	BF1204235

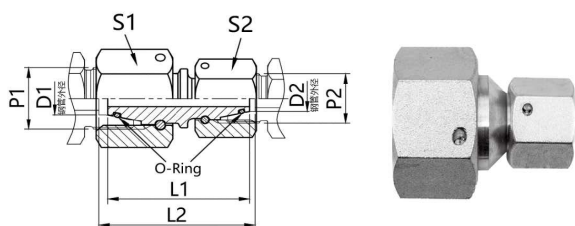

GZR 组合变径接头 Combined reducing connector


- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
8	6	37	39	19	17	M16x1.	M14x1.5		GZR08/06S	BF1700806
10	6	40.5	42.5	22	17	M18x1.	M14x1.5		GZR10/06S	BF1701006
10	8	39	41	22	19	M18x1.	M16x1.5		GZR10/08S	BF1701008
12	6	39	43	24	17	M20x1.	M14x1.5		GZR12/06S	BF1701206
12	8	44	46	24	19	M20x1.	M16x1.5		GZR12/08S	BF1701208
12	10	41.5	43.5	24	22	M20x1.	M18x1.5		GZR12/10S	BF1701210
16	10	43.5	46.5	30	22	M24x1.	M18x1.5		GZR16/10S	BF1701610
16	12	47.5	50.5	30	24	M24x1.	M20x1.5		GZR16/12S	BF1701612
20	12	48.5	52	36	24	M30x2	M20x1.5		GZR20/12S	BF1702012
20	16	52.5	57	36	30	M30x2	M24x1.5		GZR20/16S	BF1702016
25	16	52	58	46	30	M36x2	M24x1.5		GZR25/16S	BF1702516
25	20	58	64.5	46	36	M36x2	M30x2		GZR25/20S	BF1702520
30	16	54	61.5	50	30	M42x2	M24x1.5		GZR30/16S	BF1703016
30	20	58.5	66.5	50	36	M42x2	M30x2		GZR30/20S	BF1703020
30	25	60	69.5	50	46	M42x2	M36x2		GZR30/25S	BF1703025
38	20	61	71.5	60	36	M52x2	M30x2		GZR38/20S	BF1703820
38	25	62.5	74.5	60	46	M52x2	M36x2		GZR38/25S	BF1703825
38	30	64.5	78	60	50	M52x2	M42x2		GZR38/30S	BF1703830

GZR

组合变径接头

Combined reducing connector

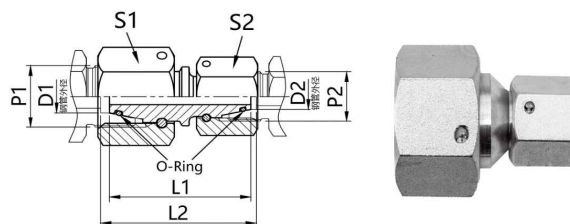

- 符合ISO8434-1, 24°卡套连接作用
- 常规供货碳钢/表面镀锌, 不锈钢
- 可提供氟橡胶密封圈
- Complies with ISO8434-1, 24° ferrule connection
- Commonly available carbon steel/galvanized surface, stainless steel
- Fluororubber sealing ring available

钢管外径		尺寸		六角		螺纹		重量	型号	产品编码
D1	D2	L1	L2	S1	S2	P1	P2	kg/100	Type	Product Code
6	6	35.5	37.5	17	17	M12x1.5	M14x1.5		GZR06L/06S	BF1420606
8	8	35.5	37.5	17	19	M14x1.5	M16x1.5		GZR08L/08S	BF1420808
10	10	38.5	40	19	22	M16x1.5	M18x1.5		GZR10L/10S	BF1421010
12	12	39	40.5	22	24	M18x1.5	M20x1.5		GZR12L/12S	BF1421212
18	16	43.5	46.5	32	30	M26x1.5	M24x1.5		GZR18L/16S	BF1421816
22	20	50	53.5	36	36	M30x2	M30x2		GZR22L/20S	BF1422220
28	25	52.5	57.5	46	46	M36x2	M36x2		GZR28L/25S	BF1422825
35	30	61	69	50	50	M45x2	M42x2		GZR35L/30S	BF1423530
42	38	55	66	60	60	M52x2	M52x2		GZR42L/28S	BF1424228
16	15	42.5	45	30	27	M24x1.5	M22x1.5		GZR16S/15L	BF1421516
20	18	47.5	51	36	32	M30x2	M26x1.5		GZR20S/18L	BF1421820
25	22	57	62	46	36	M36x2	M30x2		GZR25S/22L	BF1422225
30	28	59	65.5	50	46	M42x2	M36x2		GZR30S/28L	BF1422830
38	35	62	72.5	60	50	M52x2	M45x2		GZR38S/35L	BF1423538