


PAV1

快换接头

Quick-change connector

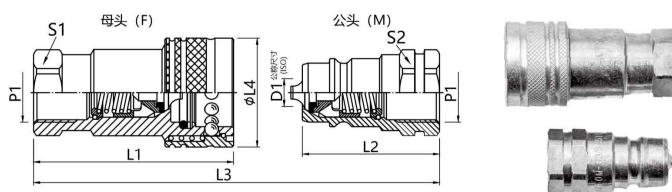

- 符合ISO7241-1
- Complies with ISO7241-1
- 常规供货碳钢/表面镀锌, 黄色钢
- Generally available Carbon steel/galvanized surface, yellow steel
- 工作温度: - 25°C ~+ 125°C
- Working temperature: - 25°C ~+ 125°C
- 标准密封: 丁腈橡胶
- Standard seal: Nitrile rubber

公称尺寸 (ISO)		尺寸				六角		螺纹	型号 (母头F)	产品编码	型号 (公头M)	产品编码
D1	L1	L2	L3	L4	S1	S2	P1	Type	Product Code	Type	Product Code	
6.3	49	35	70	26	19	19	G1/4A	PAV1.0606.002	QC11150404	PAV1.0606.003	QC11100404	
							1/4NPT	PAV1.0606.012	QC11170404	PAV1.0606.013	QC11120404	
							RC1/4	PAV1.0606.042	QC11160404	PAV1.0606.043	QC11110404	
10	60.5	42.5	85	30	22	22	G3/8A	PAV1.1010.002	QC11250606	PAV1.1010.003	QC11200606	
							3/8NPT	PAV1.1010.012	QC11270606	PAV1.1010.013	QC11220606	
							RC3/8	PAV1.1010.042	QC11260606	PAV1.1010.043	QC11210606	
12.5	70	48	96	38	27	27	G1/2A	PAV1.1313.002	QC11350808	PAV1.1313.003	QC11300808	
							1/2NPT	PAV1.1313.012	QC11370808	PAV1.1313.013	QC11320808	
							RC1/2	PAV1.1313.042	QC11360808	PAV1.1313.043	QC11310808	
20	84.5	57	114	45	34	34	G3/4A	PAV1.2019.002	QC11451212	PAV1.2019.003	QC11401212	
							3/4NPT	PAV1.2019.012	QC11471212	PAV1.2019.013	QC11421212	
							RC3/4	PAV1.2019.042	QC11461212	PAV1.2019.043	QC11411212	
25	99	65.5	131	52	41	41	G1A	PAV1.2525.002	QC11551616	PAV1.2525.003	QC11501616	
							1NPT	PAV1.2525.012	QC11571616	PAV1.2525.013	QC11521616	
							RC1	PAV1.2525.042	QC11561616	PAV1.2525.043	QC11511616	
31.5	117	75	150	70	50	50	G1 1/4A	PAV1.3031.002	QC11652020	PAV1.3031.003	QC11602020	
							1 1/4NPT	PAV1.3031.012	QC11672020	PAV1.3031.013	QC11622020	
							RC1 1/4	PAV1.3031.042	QC11662020	PAV1.3031.043	QC11612020	
40	133	84	167	82	60	60	G1 1/2A	PAV1.3939.002	QC11752424	PAV1.3939.003	QC11702424	
							1 1/2NPT	PAV1.3939.012	QC11772424	PAV1.3939.013	QC11722424	
							RC1 1/2	PAV1.3939.042	QC11762424	PAV1.3939.043	QC11712424	
50	169	108	216	99	75	75	G2A	PAV1.5051.002	QC11853232	PAV1.5051.003	QC11803232	
							2NPT	PAV1.5051.012	QC11873232	PAV1.5051.013	QC11823232	
							RC2	PAV1.5051.042	QC11863232	PAV1.5051.043	QC11813232	

公称尺寸 ISO	公称通径 DN(mm)	最大工作压力 Mpa	爆破压力 Mpa	额定流量 L/m
6.3	5	35	151	12
10	9	35	147	23
12.5	10.6	25	100	45
20	15.7	25	90	106
25	17.3	20	130	189
31.5	22.8	20	114	288
40	30	19	81	379
50	37.6	16	65	757